

INSTRUCTIONS > APPLICATION OF TRANSLUCENT VINYL TO ILLUMINATED BUILDING CHANNEL LETTERS


Food Mart Car Wash

Preparation


Clean the letter face and the trim thoroughly before application of translucent vinyl.

Instructions


Step 1. Cut the vinyl slightly oversized of the letter you are applying to.

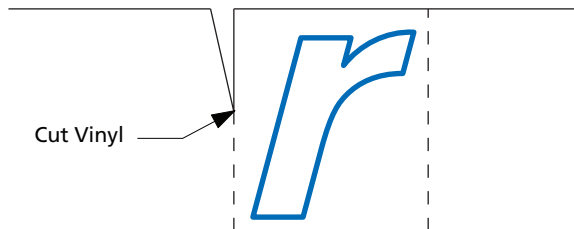


Step 2. Remove 1/2 of the liner and position vinyl with margins on 4 sides.

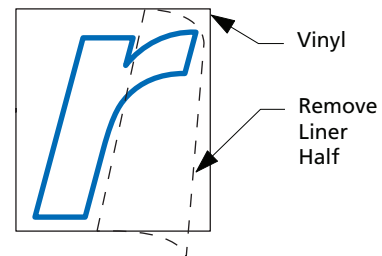

Step 3. Squeegee center of letter stroke in an outward motion to tack down vinyl and then squeegee edges into the crease of face and trim.

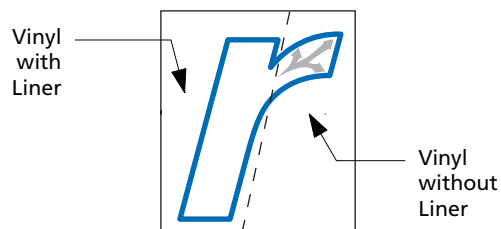

Step 4. Remove remaining 1/2 of the liner and squeegee center of letter stroke in an outward motion to tack down vinyl and then squeegee edges into the crease of face and trim.

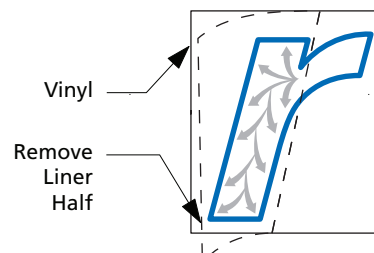

If readily accessible, the preferred method of application is to apply vinyl to letter faces while positioned on building.

If this is not applicable, loosen screws that hold letter faces and trim, remove letter faces and bring to street level to apply vinyl.

NOTE: Do **NOT** apply too much pressure to letter faces. Too much pressure will remove letter face from trim.

THINK > IMAGE

THINK >

lsi
Graphic Solutions *plus*™